

Specifications*

MODEL		SB22m	SB25h
ENGINE (DIESEL)			
Model		A1000N3	A1100N2
Type		Water cooled 3-cylinder diesel, STAGE V	
Displacement	(cc)	1058	1175
Engine gross power	(HP/ kW)	21/ 15.3	24/ 17.9
Rated speed	(rpm.)	2600	
Torque	(Nm @ rpm)	62 @ 2100	65 @ 2100
Fuel tank capacity	(l.)	23	
Combustion system		Indirect	
Battery	(V.)	12	
Air cleaner		Dry, element	
TRAVELLING SYSTEM			
Transmission		Mechanical	Hydrostatic
Groups		6 F / 2 R	2
Max. forward speed	(km/h)	19	21.4
Drive system		4 wheel drive	
Clutch		Dry, single plate	
Brake		Wet, multidisc	
Sperddifferential		Rear	
TIRES			
Agri	Front	6-12	
	Rear	9.5-16	
Turf	Front	23x8.5x12	
	Rear	33x12.5-16.5	
Industry	Front	23x8.5x12	
	Rear	12-16.5	
PTO			
Rear PTO	(rpm.)	540 and 960	
Mid PTO	(rpm.)	2600	
HYDRAULIC SYSTEM			
Main	(lpm.)	18.2	
Steering	(lpm.)	13	
Steering category		Power Assisted Hydrostatic	
Control type		Position	
Remote control valve		1 double acting rear	
Hitch category		Cat. 1	
Max. lift capacity	(kg)	650	
DIMENSIONS			
Length	(mm)	3066	
Width	(mm)	1124	
Height	(mm)	2216	
Ground clearance	(mm)	315	
Wheelbase	(mm)	1502	
Weight incl. ROPS	(kg)	770	780

*The specifications are subject to change without notice.

COMPACT TRACTOR

SB22-25

SHIBAURA



⚠ Important information

• Improper use of any product may cause serious or fatal injury. Read, understand and follow carefully the operating and safety instructions in your owner's manual before using such products.



SHIBAURA EUROPE BV
 Begonialaan 7
 NL - 6851 TE Huissen
 T. 0031 (0)26 326 9999
 F. 0031 (0)26 326 9990
 E. info@shibaaura.com
 I. www.shibaaura.com

Dealer:

DASHBOARD



Clear visibility of dashboard allows easy monitoring of the tractor's condition: rated speed, temperature and tank capacity.

FRONT LIFT



Frontlift cat. 0 with a lift capacity of 700 kg.

PTO LEVER




Easy to use PTO comes standard with 2 speeds rear and 1 speed mid.

PEDALS



Hydrostatic control pedals for smooth handsfree forward & reverse motion (hst-models).

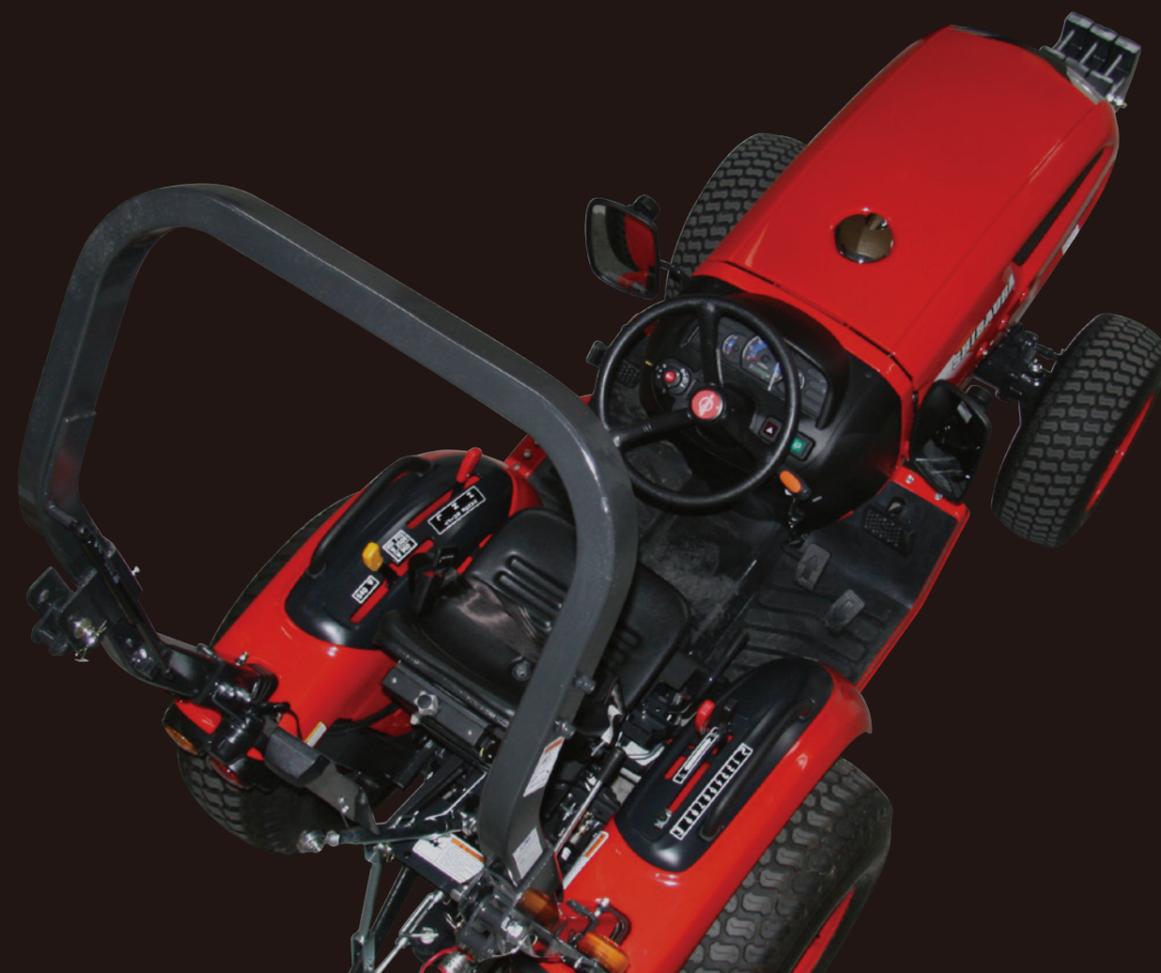

ENGINE



3-cylinder diesel engine delivers the highest power in its class with outstanding durability and reliability. The engines of SB22 and SB25 comply with the Stage V emission standard.

SEAT



The operating levers are placed within easy reach on the left and right of the seat for ergonomic operation.

3-POINT HITCH



3-point hitch rear Category I provides a lift capacity of 650 kg.

TIRES



Industrial-, agricultural- and turf tires.